

myBLOCKER

Secure Video Blocker


MyBlocker is Fibernet's secure on-the-go video blocker solution. Safely connect a computer to any video display, thus preventing potential cyber attacks and data leakage. The MyBlocker ensures unidirectional video transmission from the computer to the monitor, effectively preventing any data flow back to the computer.



FEATURES

- **Pocket-size:** Ideal for on-the-go use, whether conducting presentations or moving between meeting rooms.
- **Plug-and-play use:** Immediate and hassle-free operation. No need for additional software installation or complex setup procedures.
- **High fidelity:** Original video and audio quality are retained.
- **Video output resolution selection:** A switch allows you to easily toggle between HD (1080p) and 4K video output resolution.
- **Two video input interfaces options:** Choose between two models, one featuring HDMI video input and the other offering DisplayPort video input.



TYPICAL INSTALLATION LAYOUT

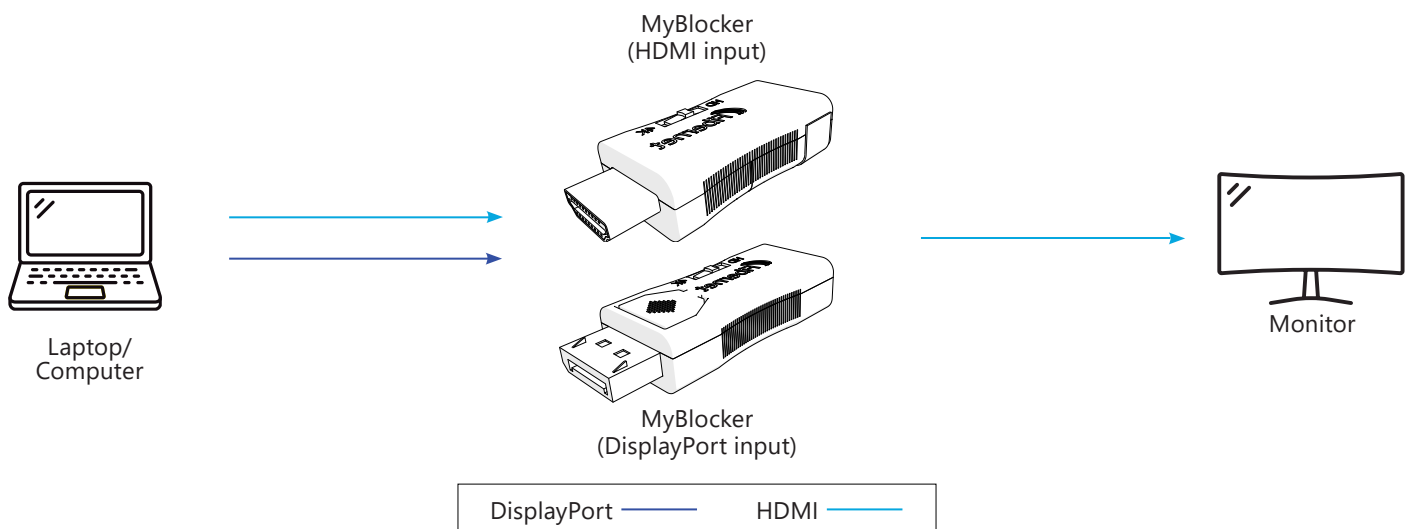



PORTS

CONNECTION PORTS	FIS-SVID-11HD-4K/FHD Rev B	FIS-SVID-11DP-4K/FHD Rev B
Video input	HDMI 1.4	DisplayPort
Video output	HDMI 1.4	HDMI 1.4

MyBlocker – HDMI Input (FIS-SVID-11HD-4K/FHD Rev B)

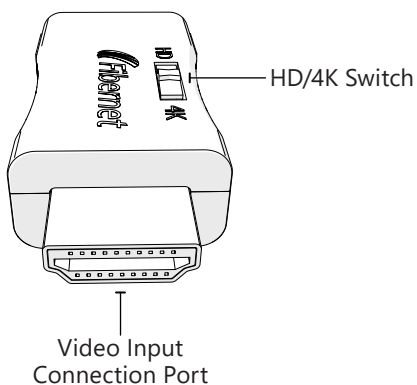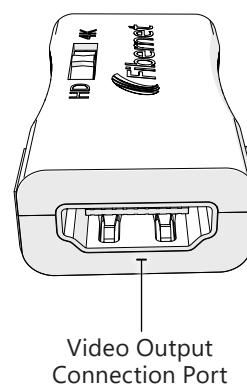


MyBlocker – DisplayPort Input (FIS-SVID-11DP-4K/FHD Rev B)

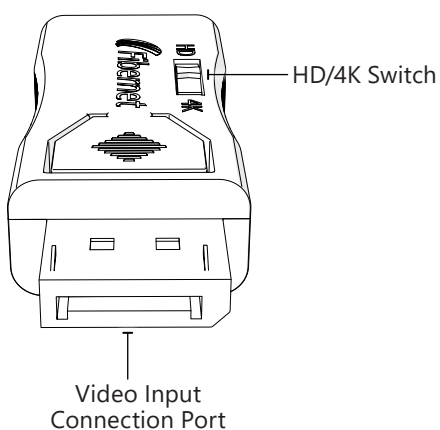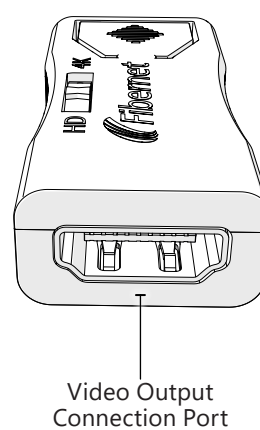


SPECIFICATIONS

FUNCTIONS	FIS-SVID-11HD-4K/FHD Rev B	FIS-SVID-11DP-4K/FHD Rev B
Unidirectional data transmission	Yes	Yes
Switch between HD and 4K video*	Yes	Yes
* After toggling the switch, MyBlocker must be disconnected and reconnected to activate the correct resolution		
GENERAL SPECIFICATIONS	FIS-SVID-11HD-4K/FHD Rev B	FIS-SVID-11DP-4K/FHD Rev B
Video resolution	Up to 4K@30Hz	Up to 4K@30Hz
Max power consumption	5 Watts	5 Watts
Unit dimensions (H x W x D)	12.1 x 22 x 48.7 mm	12.1 x 22 x 57 mm
Package dimensions (H x W x D)	21.34 x 100.34 x 65.08 mm	21.34 x 100.34 x 65.08 mm
Unit weight	11.2 g	136 g
Weight (including package)	33.8 g	36 g
Operating temperature range	0°C to 50°C (32°F to 122°F)	0°C to 50°C (32°F to 122°F)
Storage temperature range	-20°C to 75°C (-4°F to 167°F)	-20°C to 75°C (-4°F to 167°F)
Operating humidity	Up to 90% (non-condensing)	Up to 90% (non-condensing)
Color	Black	Black

**MyBlocker – HDMI Input
(FIS-SVID-11HD-4K/FHD Rev B)**

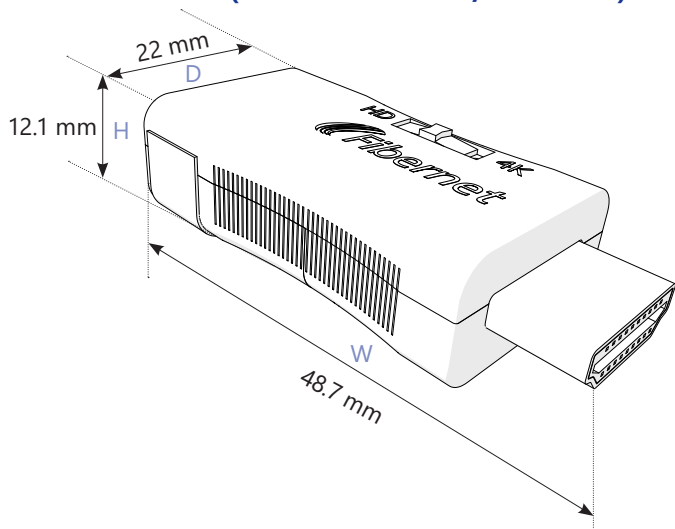

**MyBlocker – DisplayPort Input
(FIS-SVID-11DP-4K/FHD Rev B)**

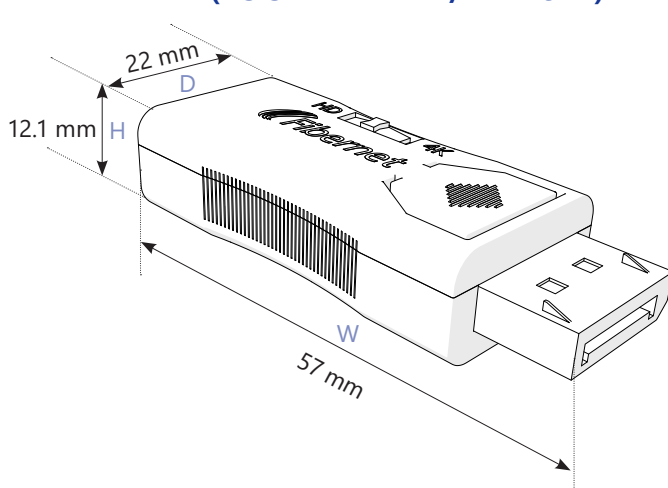

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
FIS-SVID-11HD-4K/FHD Rev B	Secure HDMI video blocker; HD/4K resolution
FIS-SVID-11DP-4K/FHD Rev B	Secure DisplayPort video blocker; HD/4K resolution

